

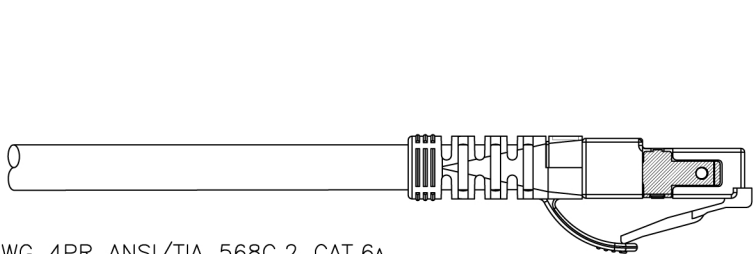
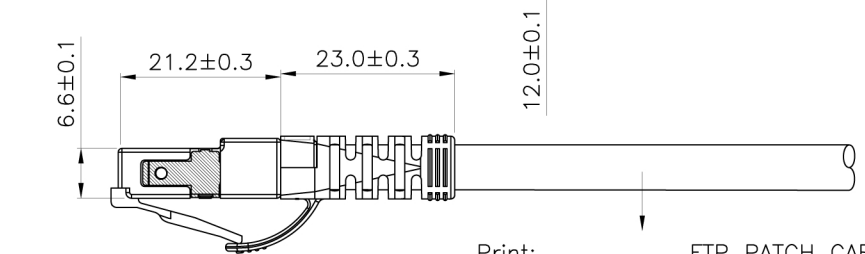
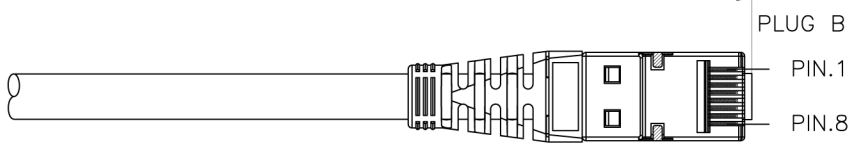
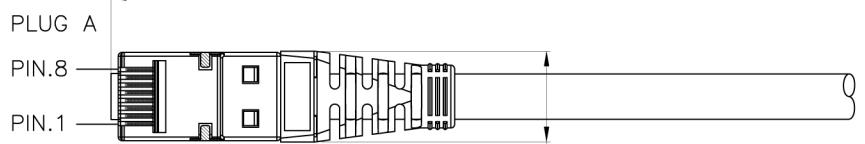


1 2 3 4 5 6

Total length (optional)



Print: FTP PATCH CABLE 26AWG 4PR ANSI/TIA 568C.2 CAT.6A
LSOH XXXXXXXX-X

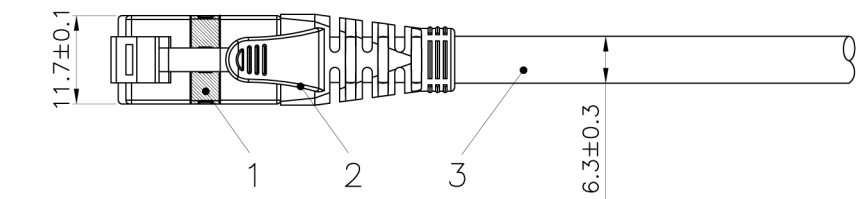

Remark : ACBHXX060X XXX X
(1) (2) (3) (4)

- (1) XX : Jacket Color
01=Black(RAL9011), 02=Gray(RAL7035), 03=Red(RAL3031)
05=White(RAL9010), 06=Yellow(RAL1021), 07=Blue(RAL5015)
08=Green(RAL6029), 09=Orange(RAL2003), 10=Purple(RAL4005)
11=Pink(RAL4003)
- (2) X : Wiring
1=T568A, 2=T568B, 3=T568A & T568B combination
- (3) XXX : Length
- (4) Length Unit : 1=cm, 2=meter, 3=feet.
(3)(4) : 0501=0.5meter(50cm), 0012=1meter, 0102=10meter
0033=3feet, 0103=10feet

Specification :

Material :

1. RJ45 Plug :
 - 1-1. Housing : Polycarbonate, UL 94V-2, Transparent color.
 - 1-2. Contact material : Phosphor Bronze with 50-60 micro-inch Nickel plated.
 - 1-3. Contact finished : Min. 50 micro-inch Gold plated on surface contact area.
 - 1-4. Shield : Bronze with Nickel plated.
2. Molding : PP-P0060GN Boot.
3. Cable :
 - 3-1. Jacket : LSOH.
 - 3-2. Conductor : 26 AWG stranded copper.
 - 3-3. Isolation : PE.
 - 3-4. Shield : Aluminum Foil Shielded for Each Pair, Tin Copper Braid.
4. Cable structure : S/FTP, 4 twisted pair.
 - 4-1. Operating Temperature : -20 to 60°C degrees

GENERAL TOLERANCE OF DIMENSIONS X.XXX ±0.005 X.XX ±0.05 X.X ±0.1	DRAWING	12.OCT.2011	YAN	Mini6™
	CHECK	12.OCT.2011	MAER	
	APPROVAL	12.OCT.2011	FRANK	
		DATE	NAME	
SCALE	- (A4)	UNIT	mm	DES.: Mini6 CAT6a patch cables
		DRAWING NO. PCTS6XXXX		
DRAWING CLASSIFICATION		S	SHEET 1 OF 1	

1 2 3 4 5 6
0 10cm